

FAT 70

INSULATED FOLDING DOOR SYSTEM

FAT 70 is an insulated folding door system. It runs smoothly with specially designed rails, bearings and hinges. It can be bunched inside and outside through the profiles that are specially designed for the system.

FAT 70 system provides multi-threshold detail-solution with its special frame structure. Opening leaves provide maximum 120 cm width and 320 cm height application.

The roller bearings used in the system have a load bearing capacity of 110kg per panel and can carry 130KG per panel with specially designed accessories. FAT 70 system provides high heat and energy saving with its profile and cord structure. The system offers a variety of hardware design options that meet all requirements of commercial and private project applications.




FAT 70




INSULATED FOLDING DOOR SYSTEM

WINDOW OPENING TYPES

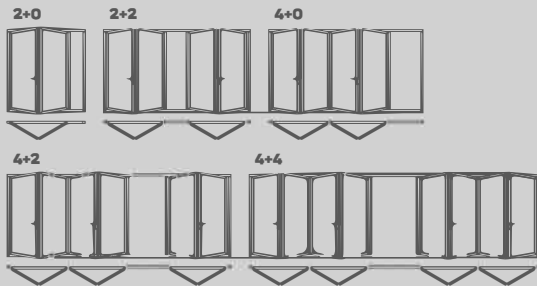

DOOR OPENING TYPES

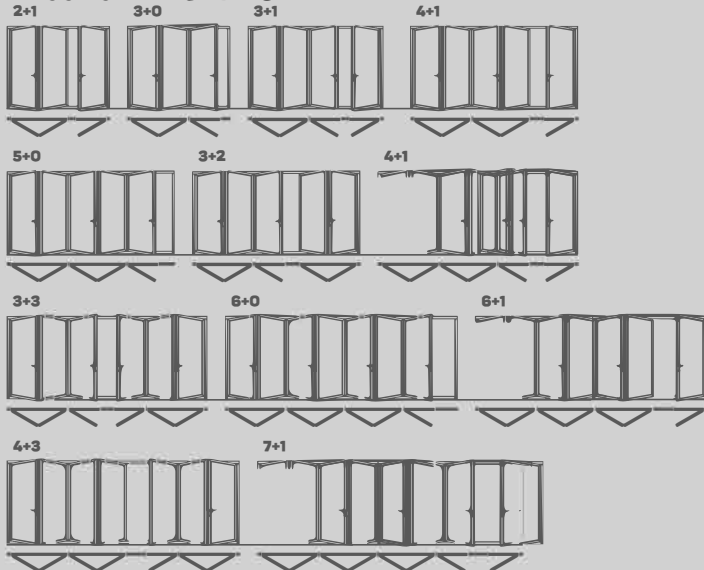

OUTWARD OPENING DOOR TYPES

