

ACCURACY



HARMONY



BALANCE

WAT 73

INSULATED DOOR & WINDOW SYSTEM

WAT 73 series is a door and window system that meets the requirements of high performance thermal insulation and sealing. It is a system with the highest level of insulated structure, increased static values, energy efficiency and durability. The WAT73 system meets European standards with high performance. 34mm heat barrier is used in the system. Wide profile structure allows the use of triple glass. WAT73 system profile designs are designed according to Eurogrove duct structure. You can use all opening accessories with a wide range of accessory application options. It is a system that PVC accessories can be applied in it.

Air Permeability (EN 12207)	CLASS 1 (150Pa)		CLASS 2 (300Pa)		CLASS 3 (450Pa)		CLASS 4 (600Pa)			
Water Tightness (EN 12208)	2A (50Pa)	3A (100Pa)	4A (150Pa)	5A (200Pa)	6A (250Pa)	7A (300Pa)	8A (450Pa)	9A (600Pa)	E1050 (750Pa)	E1200 (1500Pa)
Resistance to Wind Load (EN 12210)	CLASS C1		CLASS C2		CLASS C3		CLASS C4		CLASS C5	

Certificate Values

Air Permeability (EN 12207): 600 Pa

Water Tightness (EN 12208): 1200 Pa

Resistance to Wind Load (EN 12210): 2000 Pa


Safety Test: 3000 Pa




AMANOS
aluminium systems

WAT 73

INSULATED DOOR & WINDOW SYSTEM

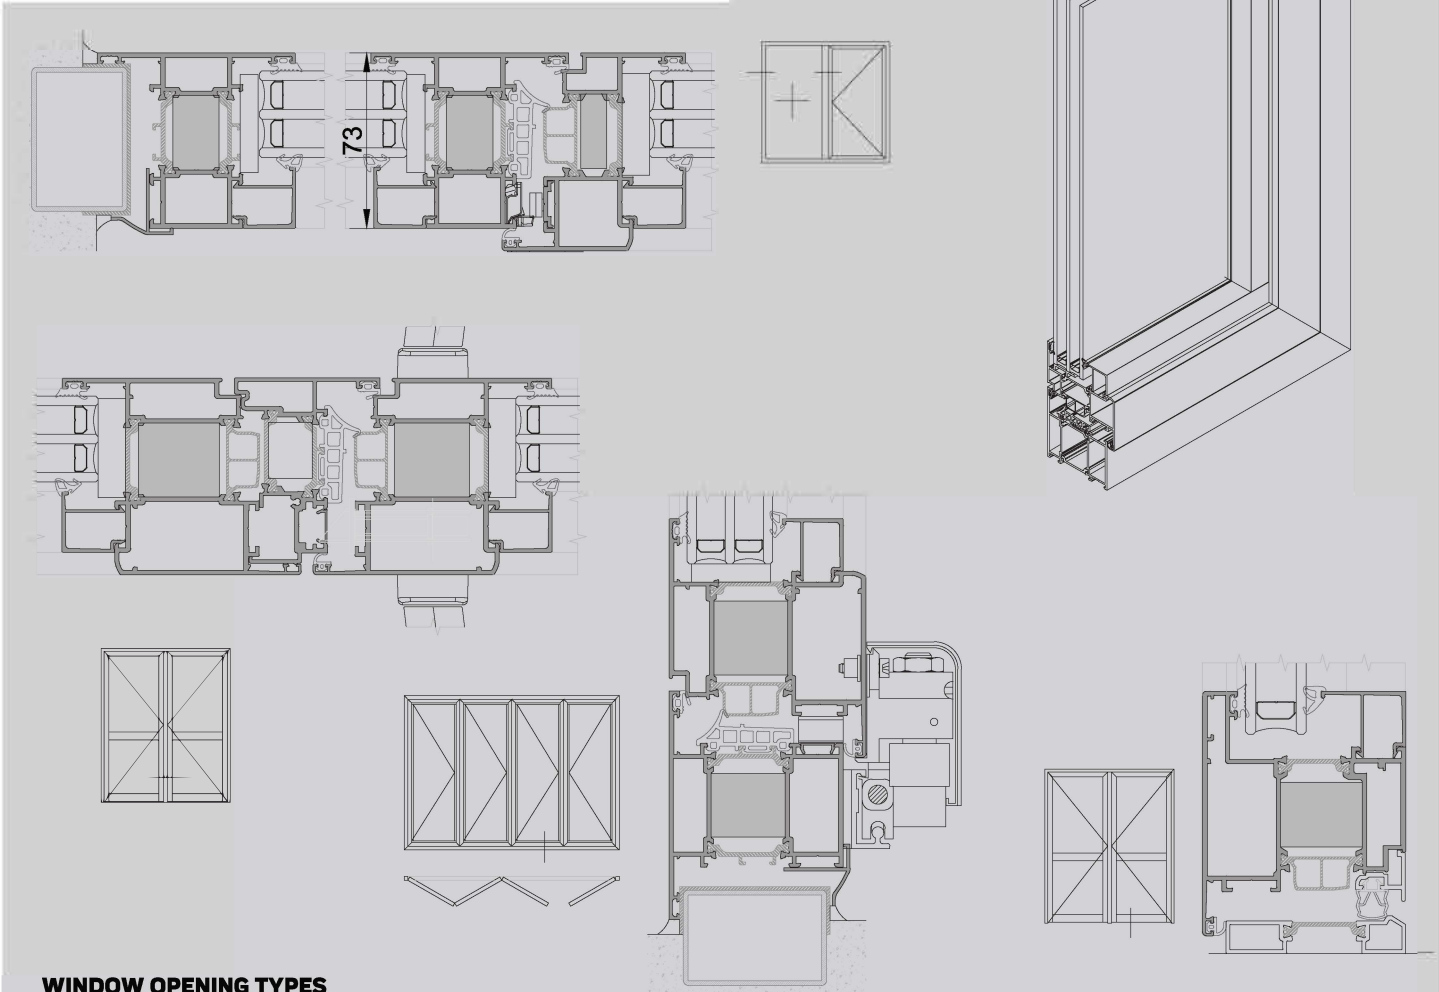

WINDOW OPENING TYPES

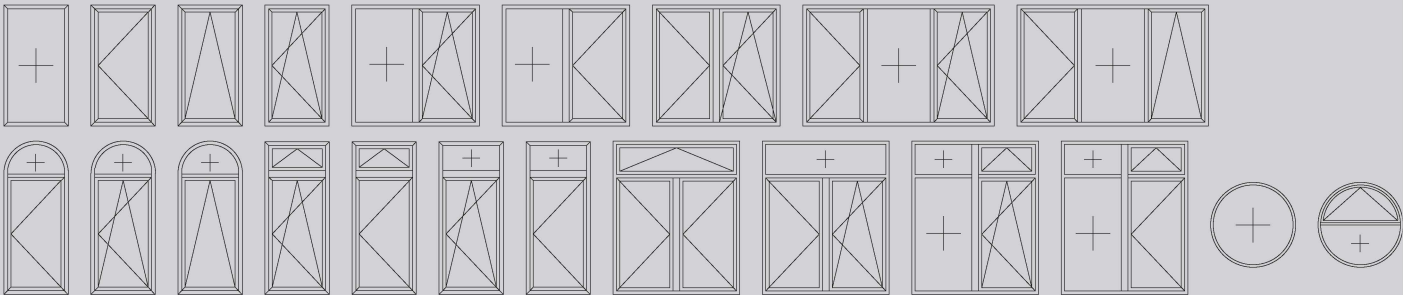

DOOR OPENING TYPES

